WALLPAPER



USER MANUAL Ref 04 / NOSC04 V8



Materials needed



Spatula
















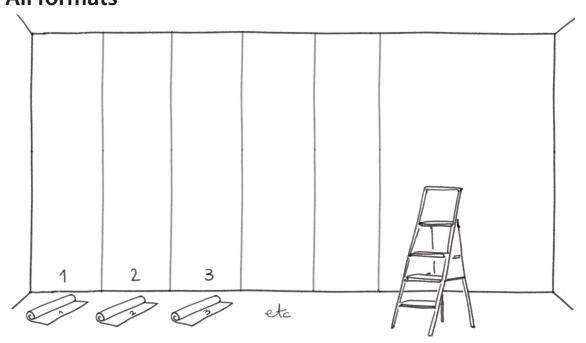


All our strips are numbered for left to right installation.




Tarpaulin





Prepare the surface: fill in the holes. Remove the socket covers and switches.






Measure the areas to be covered. Check that the ceiling is straight.








Measure the width of the first strip. Use a level to draw the dotted lines.









Crop the image according to your preference, either from the top or from the bottom, cutting off the excess (leave yourself a safety margin).



The sensitive parts of the wall need to be glued: wall, door frame/top and bottom edges.



Apply the paste onto the wall.




Present strip no. 1. Adjust to the plot. The first strip is straight.






Keep on working using the next strips whichare aligned edge to edge.



Stamp from the inside to the outside.



Cut off the excess with a cutter using the spatula (be sure to use a new blade).







Find our videos of installation on our channel YouTube

WHAT TYPE OF PASTE SHOULD I USE?

NON-WOVEN PAPER:/

We offer a non-woven backing that can be applied with any powdered adhesive intended for non-woven wallpapers. We recommend to use METY-LAN Expert paste.

To get a very strong hold, you can use a white glue that is ready-to-use.

SCENOLIA recommends that you use the following white glues:

 $1/\,For\,application\,on\,a\,normally\,absorbent\,surface\,(plaster,\,BA13,\,etc.);\,OVALIT\,TM$

2/ For application on a non-absorbent surface (melamine, blocked paints, etc.): OVALIT ULTRA

TEXTILE BACKING:

To apply our textile backing, we recommend using a white paste available in DIY stores and wallpaper specialized shops.... SCENOLIA recommends that you use the following white pastes:

1/ For installation on a normally absorbent open base (plaster, BA13, etc.): OVALIT TM

2/ For installation on a non-absorbent base (melamine, blocked paint, etc.): OVALIT ULTRA

SCENOLIA cannot be held responsible if you fail to comply with the recommendations.

Application: powder and white pastes can be applied directly to the wall with a simple wool painting roll (anti-drip painting roll).

Make sure that the pastes used are suitable for your wall. Refer to the recommendations of the wallpaper paste manufacturers.

Warning: for installation in damp environments (kitchen, bathroom, SPA, etc...) check that the textile material is a suitable

Do not install in areas where water is splashed.

SCENOLIA cannot be held responsible if you fail to comply with the recommendations.